

SM-70

GAS METAL ARC WELDING CONSUMABLES
FOR WELDING OF Mild & 490Mpa CLASS
HIGH TENSILE STEEL



❖ Specification

AWS A5.18

ER70S-6

EN ISO 14341-A

G 42 2 C G3Si1

G 42 4 M G3Si1

❖ Applications

Butt and fillet welding of vehicles, buildings, ships, machinery and bridge

❖ Characteristics on Usage

SM-70 is a solid wire designed for all position welding by short-circuiting type transfer. As the deposition efficiency is high and penetration is deep, highly efficient welding can be performed.

❖ Note on Usage


1. Use with CO₂ / Argon + 15~25% CO₂ gas.
2. Flow quantity of shielding gas should be 25ℓ/min. approximately.
3. Use wind screen against wind.
4. Keep distance between tip and base metal 6~15mm for less than 250A, and 15~25mm for more than 250A of welding current.



Mechanical Properties & Chemical Composition of All Weld Metal

❖ Welding Conditions

Method by AWS Rules

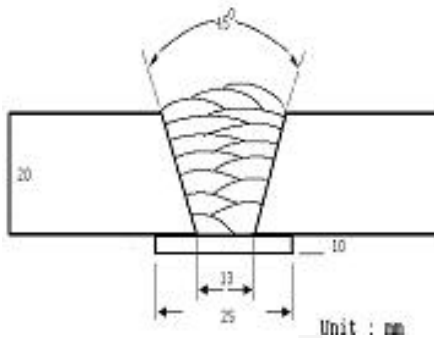

[Joint Preparation & Layer Details]

Diameter(mm)	: 1.2mm (0.045in)
Shielding Gas	: 100%CO ₂
Flow Rate(ℓ /min.)	: 20
Amp./ Volt.	: 280 / 32
Stick-Out(mm)	: 20~25
Pre-Heat(°C)	: R.T .
Interpass Temp.(°C)	: 150±15
Polarity	: DC(+)

❖ Mechanical Properties of the weld metal

Brand Name	Tensile Test Results			Charpy V-Notch Impact Value J (ft . lbs)	
	Y.S. MPa(ksi)	T.S. MPa(ksi)	EL.(%)	0°C (32°F)	-30°C (-22°F)
SM-70	450 (65.3)	550 (79.8)	28.5	120 (88.5)	75 (55.3)
AWS A5.18 ER70S-6	≥ 400	≥ 480	≥ 22	≥27J at -30°C	

❖ Chemical Analysis of the weld metal(wt%)

Brand Name	C	Si	Mn	P	S
SM-70	0.08	0.44	0.97	0.015	0.008
AWS A5.18 ER70S-6	No Spec.				


This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Mechanical Properties & Chemical Composition of All Weld Metal

❖ Welding Conditions

Method by AWS Rules

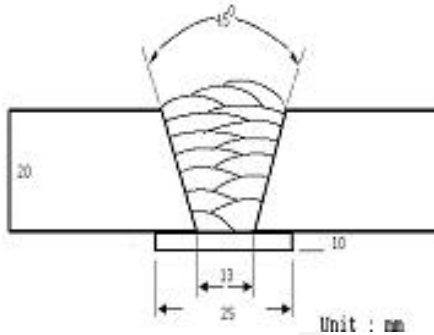

[Joint Preparation & Layer Details]

Diameter(mm)	: 1.2mm (0.045in)
Shielding Gas	: Ar + 20%CO ₂
Flow Rate(ℓ /min.)	: 20
Amp./ Volt.	: 280 / 30
Stick-Out(mm)	: 20~25
Pre-Heat(°C)	: R.T .
Interpass Temp.(°C)	: 150±15
Polarity	: DC(+)

❖ Mechanical Properties of the weld metal

Brand Name	Tensile Test Results			Charpy V-Notch Impact Value J (ft . lbs)	
	Y.S. MPa(ksi)	T.S. MPa(ksi)	EL.(%)	0°C (32°F)	-30°C (-22°F)
SM-70	470 (68.2)	565 (81.9)	28.0	135 (99.6)	90 (66.4)
AWS A5.18 ER70S-6	≥ 400	≥ 480	≥ 22	≥27J at -30°C	

❖ Chemical Analysis of the weld metal(wt%)

Brand Name	C	Si	Mn	P	S
SM-70	0.07	0.50	1.15	0.016	0.008
AWS A5.18 ER70S-6	No Spec.				

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Chemical Composition of Wire

❖ Chemical Composition of Wire (Wt%)

Brand Name	C	Si	Mn	P	S	Cu
SM-70	0.07	0.83	1.48	0.013	0.011	0.20
AWS A5.18 ER70S-6	0.06~0.15	0.80~1.15	1.40~1.85	≤ 0.025	≤ 0.035	≤ 0.50

Notice

***This test report is made for giving general information, and it's not meaning guarantee.
Test results are changeable by several welding
- parameter including base materials***

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.